



NH fuse switch-disconnector, 400A, 500V/400A, 690V/315A, size 2

Part no. **GSTA2**
 Catalog No. **021996**

Delivery program

Number of poles			For fitting on mounting plate
Rated operational current	I_e	A	400
Max. fuse			
500 V		A	400
690 V		A	315
Frame size			NH2
For use with			In conjunction with adapter plates: A-GSTA...

Technical data

General

Standards			IEC/EN 61131-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		°C	-20 - +55
Altitude		m	Max. 2000
Mounting position			Vertical or horizontal
Overvoltage category/pollution degree			III/3
Degree of protection, from the front			
Operational state			IP20
Front cover open			IP10
Direction of incoming supply			as required
Lifespan, mechanical	Operations		800
Weight		kg	3.3

Contacts

Rated operational voltage	U_e	V AC	500
Rated operational voltage	U_e	V DC	220
Rated operational current	I_e	A	400
Rated frequency	f	Hz	40 - 60
Rated conditional short-circuit current AC	I_q	kA _{eff}	50
Rated conditional short-circuit current, DC	I_q	kA _{rms}	25
Utilization category AC22B			
Rated making capacity		A	1200
Rated breaking capacity		A	1200
Utilization category DC21B			
Rated making capacity		A	475
Rated breaking capacity		A	475
Lifespan, electrical	Operations		200
Lifespan, mechanical	Operations		800
Heat dissipation at I_{th} AC, without NH-SE		W	27
Heat dissipation at I_{th} DC, without NH-SE		W	18
Rated insulation voltage	U_i	V AC	750
Rated impulse withstand voltage	U_{imp}	kV	8
Rated insulation voltage	U_i	V	750

Max. fuse

Frame size			NH2
Max. rated current, gL/gG		A	400

Max. admissible heat dissipation NH-SE	P _v	W	34
Terminal capacity			
Flange connection			
Main cable	d	mm	M10
Cable lug		mm ²	1 x 25 - 240
Flat busbar	max.	mm	30 x 10
Tightening torque		Nm	30 - 35
Box terminal			
Stranded copper		mm ²	25 ... 240
Copper braid	Lamellenzahl x Breite x Dicke	mm	10 x 16 x 0.8
Tightening torque		Nm	23
Clamp-type terminal			
Stranded aluminium/copper		mm ²	120 ... 240
Tightening torque		Nm	11
Double clamp-type terminal			
Stranded aluminium/copper		mm ²	2 x (120 - 150)
Tightening torque		Nm	11



Notes

Fuse-link

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Fuse switch disconnecter (EC001040)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Fuse switch disconnecter (ecl@ss10.0.1-27-37-14-01 [AKF058013])			
Version as main switch			No
Version as safety switch			No
Max. rated operation voltage U _e AC		V	690
Rated permanent current I _u		A	400
Rated operation power at AC-23, 400 V		kW	0
Conditioned rated short-circuit current I _q		kA	80
Rated short-time withstand current I _{cw}		kA	0
Suitable for fuses			NH2
Number of poles			3
With error protection			No
Type of electrical connection of main circuit			Cable clamp
Cable entry			
Equipped with connectors			
Suitable for ground mounting			Yes
Suitable for front mounting 4-hole			No
Suitable for busbar mounting			No
Type of control element			Cover grip
Position control element			Front side
Motor drive optional			No
Motor drive integrated			No
Version as emergency stop installation			No
Degree of protection (IP), front side			IP20

Dimensions

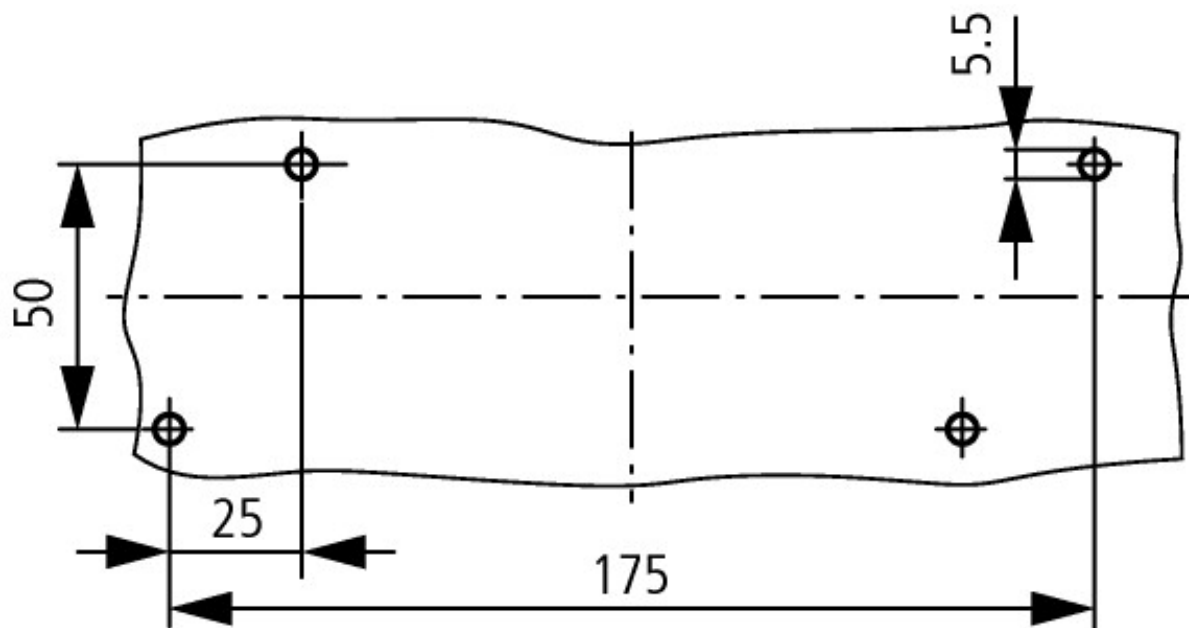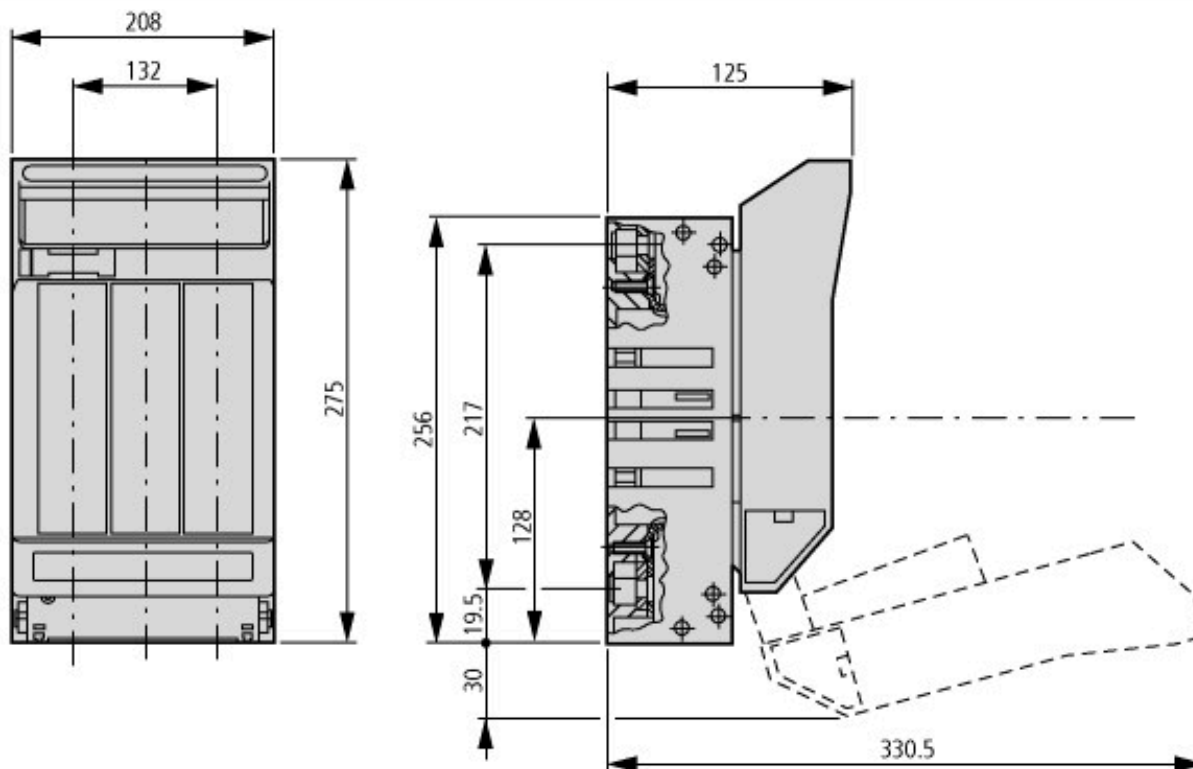

Drilling dimensions

Additional product information (links)

AWA4640-0589 Fuse switch-disconnector

AWA4640-0589 Fuse switch-disconnector ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/05890696.pdf

AWA1400-1226 Fuse switch disconnecter

AWA1400-1226 Fuse switch disconnecter ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/12260696.pdf