

Click to view price, real time Inventory,  
Delivery & Lifecycle Information ;

# NL27WZ14DTT1G

ON Semiconductor

Inverters 1.65-5.5V CMOS Dual Schmitt

Any questions, please feel free to contact us.  
[info@kaimte.com](mailto:info@kaimte.com)

# NL27WZ14

## Dual Schmitt-Trigger Inverter

The NL27WZ14 is a high performance dual inverter with Schmitt-Trigger inputs operating from a 1.65 to 5.5 V supply.

### Features

- Designed for 1.65 V to 5.5 V  $V_{CC}$  Operation
- 2.3 ns  $t_{PD}$  at  $V_{CC} = 5$  V (Typ)
- Inputs/Outputs Overvoltage Tolerant up to 5.5 V
- $I_{OFF}$  Supports Partial Power Down Protection
- Sink 32 mA at 4.5 V
- Available in SC-88, SC-74, TSOP-6 and UDFN6 Packages
- Chip Complexity < 100 FETs
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant







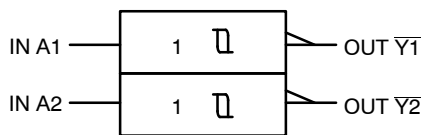






Figure 1. Logic Symbol



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

|  |  |   | MARKING<br>DIAGRAMS |
|--|--|---|---------------------|
| <br>1      | <b>SC-88</b><br>DF SUFFIX<br>CASE 419B-02    |    |                     |
| <br>6<br>1 | <b>SC-74</b><br>CASE 318F-05                 |    |                     |
| <br>1     | <b>TSOP-6</b><br>CASE 318G-02                |   |                     |
| <br>1    | <b>UDFN6</b><br>1.45x1.0, 0.5P<br>CASE 517AQ |  |                     |
| <br>1    | <b>UDFN6</b><br>1x1, 0.35P<br>CASE 517BX     |  |                     |

X, XXX = Specific Device Code  
M = Date Code\*  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

# NL27WZ14

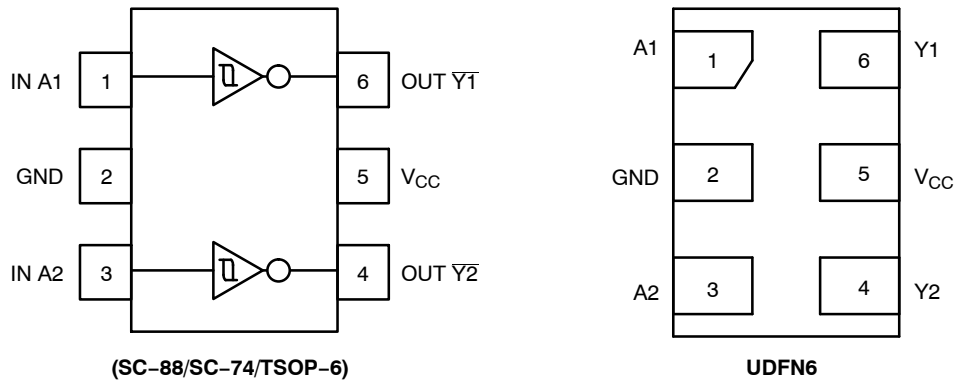


Figure 2. Pinout (Top View)

## PIN ASSIGNMENT

| Pin | Function        |
|-----|-----------------|
| 1   | A1              |
| 2   | GND             |
| 3   | A2              |
| 4   | Y2              |
| 5   | V <sub>CC</sub> |
| 6   | Y1              |

## FUNCTION TABLE

| A Input | Y Output |
|---------|----------|
| L       | H        |
| H       | L        |

# NL27WZ14

## MAXIMUM RATINGS

| Symbol                              | Characteristics   | Value  | Units |      |
|-------------------------------------|---|--|-------|------|
| V <sub>CC</sub>                     | DC Supply Voltage<br>SC-88 (NLV)<br>SC-88, SC-74, TSOP-6, UDFN6   | -0.5 to +7.0<br>-0.5 to +6.5                                 | V     |      |
| V <sub>IN</sub>                     | DC Input Voltage<br>SC-88 (NLV)<br>SC-88, SC-74, TSOP-6, UDFN6  | -0.5 to +7.0<br>-0.5 to +6.5                                 | V     |      |
| V <sub>OUT</sub>                    | DC Output Voltage<br>SC-88 (NLV)<br>Active-Mode (High or Low State)<br>Tri-State Mode (Note 1)<br>Power-Down Mode (V <sub>CC</sub> = 0 V)                 | -0.5 to V <sub>CC</sub> +0.5<br>-0.5 to +7.0<br>-0.5 to +7.0 | V     |      |
|                                     | DC Output Voltage<br>SC-88, SC-74, TSOP-6, UDFN6<br>Active-Mode (High or Low State)<br>Tri-State Mode (Note 1)<br>Power-Down Mode (V <sub>CC</sub> = 0 V) | -0.5 to V <sub>CC</sub> +0.5<br>-0.5 to +6.5<br>-0.5 to +6.5 | V     |      |
| I <sub>IK</sub>                     | DC Input Diode Current, V <sub>IN</sub> < GND   | -50  | mA    |      |
| I <sub>OK</sub>                     | DC Output Diode Current, V <sub>OUT</sub> < GND   | ±50  | mA    |      |
| I <sub>OUT</sub>                    | DC Output Source/Sink Current   | ±50  | mA    |      |
| I <sub>CC</sub> or I <sub>GND</sub> | DC Supply Current per Supply Pin or Ground Pin  | ±100   | mA    |      |
| T <sub>STG</sub>                    | Storage Temperature Range   | -65 to +150  | °C    |      |
| T <sub>L</sub>                      | Lead Temperature, 1 mm from Case for 10 secs  | 260  | °C    |      |
| T <sub>J</sub>                      | Junction Temperature under Bias   | +150   | °C    |      |
| θ <sub>JA</sub>                     | Thermal Resistance (Note 2)   | SC-88  | 659   | °C/W |
|                                     |   | SC-74  | 555   |      |
|                                     |   | UDFN6  | 382   |      |
| P <sub>D</sub>                      | Power Dissipation in Still Air  | SC-88  | 190   | mW   |
|                                     |   | SC-74  | 225   |      |
|                                     |   | UDFN6  | 327   |      |
| MSL                                 | Moisture Sensitivity  | Level 1  | -     |      |
| F <sub>R</sub>                      | Flameability Rating<br>Oxygen Index: 28 to 34   | UL 94-V-0 @ 0.125 in   | -     |      |
| V <sub>ESD</sub>                    | ESD Withstand Voltage (Note 3)<br>Human Body Model<br>Charged Device Model<br>(NLV) Charged Device Model  | 2000   | V     |      |
|                                     |   | 1000   |       |      |
|                                     |   | N/A  |       |      |
| I <sub>LATCHUP</sub>                | Latchup Performance (Note 4)  | ±100   | mA    |      |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Applicable to devices with outputs that may be tri-stated.
2. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow.
3. HBM tested to ANSI/ESDA/JEDEC JS-001-2017. CDM tested to EIA/JESD22-C101-F. JEDEC recommends that ESD qualification to EIA/JESD22-A115-A (Machine Model) be discontinued per JEDEC/JEP172A.
4. Tested to EIA/JESD78 Class II.

## RECOMMENDED OPERATING CONDITIONS

| Symbol                          | Parameter  | Min  | Max             | Unit |
|---------------------------------|--|------|-----------------|------|
| V <sub>CC</sub>                 | Positive DC Supply Voltage   | 1.65 | 5.5             | V    |
| V <sub>IN</sub>                 | DC Input Voltage   | 0    | 5.5             | V    |
| V <sub>OUT</sub>                | DC Output Voltage<br>Active-Mode (High or Low State)<br>Tri-State Mode (Note 1)<br>Power-Down Mode (V <sub>CC</sub> = 0 V)   | 0    | V <sub>CC</sub> | V    |
|                                 |  | 0    | 5.5             |      |
|                                 |  | 0    | 5.5             |      |
| T <sub>A</sub>                  | Operating Temperature Range  | -55  | +125            | °C   |
| t <sub>r</sub> , t <sub>f</sub> | Input Transition Rise or Fall Rate<br>V <sub>CC</sub> = 1.65 V to 1.95 V<br>V <sub>CC</sub> = 2.3 V to 2.7 V<br>V <sub>CC</sub> = 3.0 V to 3.6 V<br>V <sub>CC</sub> = 4.5 V to 5.5 V | 0    | No Limit        | ns   |
|                                 |  | 0    | No Limit        |      |
|                                 |  | 0    | No Limit        |      |
|                                 |  | 0    | No Limit        |      |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# NL27WZ14

## DC ELECTRICAL CHARACTERISTICS

| Symbol           | Parameter   | Condition   | V <sub>CC</sub> (V) | T <sub>A</sub> = 25°C |                 |      | -40°C ≤ T <sub>A</sub> ≤ 85°C |      | -55°C ≤ T <sub>A</sub> ≤ 125°C |      | Unit |
|------------------|---|---|---------------------|-----------------------|-----------------|------|-------------------------------|------|--------------------------------|------|------|
|                  |   |   |                     | Min                   | Typ             | Max  | Min                           | Max  | Min                            | Max  |      |
| V <sub>T+</sub>  | Positive Input Threshold Voltage  |   | 1.65                | -                     | 1.0             | 1.4  | -                             | 1.4  | -                              | 1.4  | V    |
|                  |   |   | 2.3                 | -                     | 1.5             | 1.8  | -                             | 1.8  | -                              | 1.8  |      |
|                  |   |   | 2.7                 | -                     | 1.7             | 2    | -                             | 2    | -                              | 2    |      |
|                  |   |   | 3                   | -                     | 1.9             | 2.2  | -                             | 2.2  | -                              | 2.2  |      |
|                  |   |   | 4.5                 | -                     | 2.7             | 3.1  | -                             | 3.1  | -                              | 3.1  |      |
|                  |   |   | 5.5                 | -                     | 3.3             | 3.6  | -                             | 3.6  | -                              | 3.6  |      |
| V <sub>T-</sub>  | Negative Input Threshold Voltage  |   | 1.65                | 0.2                   | 0.5             | -    | 0.2                           | -    | 0.2                            | -    | V    |
|                  |   |   | 2.3                 | 0.4                   | 0.75            | -    | 0.4                           | -    | 0.4                            | -    |      |
|                  |   |   | 2.7                 | 0.5                   | 0.87            | -    | 0.5                           | -    | 0.5                            | -    |      |
|                  |   |   | 3                   | 0.6                   | 1.0             | -    | 0.6                           | -    | 0.6                            | -    |      |
|                  |   |   | 4.5                 | 1.0                   | 1.5             | -    | 1.0                           | -    | 1.0                            | -    |      |
|                  |   |   | 5.5                 | 1.2                   | 1.9             | -    | 1.2                           | -    | 1.2                            | -    |      |
| V <sub>H</sub>   | Input Hysteresis Voltage  |   | 1.65                | 0.1                   | 0.48            | 0.9  | 0.1                           | 0.9  | 0.1                            | 0.9  | V    |
|                  |   |   | 2.3                 | 0.25                  | 0.75            | 1.1  | 0.25                          | 1.1  | 0.25                           | 1.1  |      |
|                  |   |   | 2.7                 | 0.3                   | 0.83            | 1.15 | 0.3                           | 1.15 | 0.3                            | 1.15 |      |
|                  |   |   | 3                   | 0.4                   | 0.93            | 1.2  | 0.4                           | 1.2  | 0.4                            | 1.2  |      |
|                  |   |   | 4.5                 | 0.6                   | 1.2             | 1.5  | 0.6                           | 1.5  | 0.6                            | 1.5  |      |
|                  |   |   | 5.5                 | 0.7                   | 1.4             | 1.7  | 0.7                           | 1.7  | 0.7                            | 1.7  |      |
| V <sub>OH</sub>  | High-Level Output Voltage<br>V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> | I <sub>OH</sub> = -100 μA                           | 1.65 to 5.5         | V <sub>CC</sub> - 0.1 | V <sub>CC</sub> | -    | V <sub>CC</sub> - 0.1         | -    | V <sub>CC</sub> - 0.1          | -    | V    |
|                  |   | I <sub>OH</sub> = -4 mA                             | 1.65                | 1.29                  | 1.52            | -    | 1.29                          | -    | 1.29                           | -    |      |
|                  |   | I <sub>OH</sub> = -8 mA                             | 2.3                 | 1.9                   | 2.1             | -    | 1.9                           | -    | 1.8                            | -    |      |
|                  |   | I <sub>OH</sub> = -12 mA                            | 2.7                 | 2.2                   | 2.4             | -    | 2.2                           | -    | 2.1                            | -    |      |
|                  |   | I <sub>OH</sub> = -16 mA                            | 3                   | 2.4                   | 2.7             | -    | 2.4                           | -    | 2.3                            | -    |      |
|                  |   | I <sub>OH</sub> = -24 mA                            | 3                   | 2.3                   | 2.5             | -    | 2.3                           | -    | 2.2                            | -    |      |
|                  |   | I <sub>OH</sub> = -32 mA                            | 4.5                 | 3.8                   | 4               | -    | 3.8                           | -    | 3.7                            | -    |      |
| V <sub>OL</sub>  | Low-Level Output Voltage<br>V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>  | I <sub>OL</sub> = 100 μA                            | 1.65 to 5.5         | -                     | -               | 0.1  | -                             | 0.1  | -                              | 0.1  | V    |
|                  |   | I <sub>OL</sub> = 4 mA                              | 1.65                | -                     | 0.08            | 0.24 | -                             | 0.24 | -                              | 0.24 |      |
|                  |   | I <sub>OL</sub> = 8 mA                              | 2.3                 | -                     | 0.2             | 0.3  | -                             | 0.3  | -                              | 0.4  |      |
|                  |   | I <sub>OL</sub> = 12 mA                             | 2.7                 | -                     | 0.22            | 0.4  | -                             | 0.4  | -                              | 0.5  |      |
|                  |   | I <sub>OL</sub> = 16 mA                             | 3                   | -                     | 0.28            | 0.4  | -                             | 0.4  | -                              | 0.5  |      |
|                  |   | I <sub>OL</sub> = 24 mA                             | 3                   | -                     | 0.38            | 0.55 | -                             | 0.55 | -                              | 0.55 |      |
|                  |   | I <sub>OL</sub> = 32 mA                             | 4.5                 | -                     | 0.42            | 0.55 | -                             | 0.55 | -                              | 0.65 |      |
| I <sub>IN</sub>  | Input Leakage Current   | V <sub>IN</sub> = 5.5 V or GND                      | 1.65 to 5.5         | -                     | -               | ±0.1 | -                             | ±1.0 | -                              | ±1.0 | μA   |
| I <sub>OFF</sub> | Power Off Leakage Current   | V <sub>IN</sub> = 5.5 V or V <sub>OUT</sub> = 5.5 V | 0                   | -                     | -               | 1    | -                             | 10   | -                              | 10   | μA   |
| I <sub>CC</sub>  | Quiescent Supply Current  | V <sub>IN</sub> = 5.5 V or GND                      | 5.5                 | -                     | -               | 1    | -                             | 10   | -                              | 10   | μA   |

# NL27WZ14

## AC ELECTRICAL CHARACTERISTICS (Input $t_R = t_F = 3.0$ ns)


| Symbol   | Parameter                              | Condition  | $V_{CC}$ (V) | $T_A = 25^\circ\text{C}$ |     |     | $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ |      | $-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$ |      | Unit |
|--|--|--|--------------|--------------------------|-----|-----|--|------|---|------|------|
|  |  |  |              | Min                      | Typ | Max | Min  | Max  | Min   | Max  |      |
| $t_{PLH}$<br>$t_{PHL}$                             | Propagation Delay<br>(Figures 3 and 4) | $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 15\text{ pF}$ | 1.65 to 1.95 | -                        | 7.1 | 13  | -  | 14.5 | -   | 15.5 | ns   |
|  |  |  | 2.3 to 2.7   | -                        | 4.3 | 7.4 | -  | 8.1  | -   | 9.1  |      |
| $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 15\text{ pF}$ |  | 3.0 to 3.6   | -            | 3.3                      | 5   | -   | 5.5  | -    | 6.5   |      |      |
|  |  | 4.5 to 5.5   | -            | 2.7                      | 4.1 | -   | 4.5  | -    | 5.5   |      |      |
|  |  | $R_L = 500\ \Omega$ ,<br>$C_L = 50\text{ pF}$      | 3.0 to 3.6   | -                        | 4   | 6   | -  | 6.6  | -   | 7.6  |      |
| 4.5 to 5.5   |  |  | -            | 3.2                      | 4.9 | -   | 5.4  | -    | 6.4   |      |      |

## CAPACITIVE CHARACTERISTICS

| Symbol    | Parameter                              | Condition  | Typical    | Unit |
|-----------|--|--|------------|------|
| $C_{IN}$  | Input Capacitance                      | $V_{CC} = 5.5\text{ V}$ , $V_I = 0\text{ V}$ or $V_{CC}$   | 2.5        | pF   |
| $C_{OUT}$ | Output Capacitance                     | $V_{CC} = 5.5\text{ V}$ , $V_I = 0\text{ V}$ or $V_{CC}$   | 4.0        | pF   |
| $C_{PD}$  | Power Dissipation Capacitance (Note 5) | 10 MHz, $V_{CC} = 3.3\text{ V}$ , $V_{IN} = 0\text{ V}$ or $V_{CC}$<br>10 MHz, $V_{CC} = 5.0\text{ V}$ , $V_{IN} = 0\text{ V}$ or $V_{CC}$ | 11<br>12.5 | pF   |

5.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in}$ .  $C_{PD}$  is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in}$   $I_{CC} \cdot V_{CC}$ .

# NL27WZ14

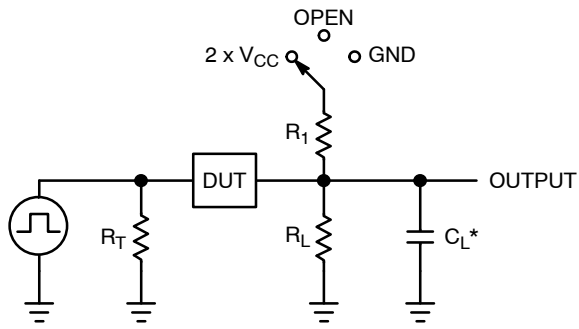


$C_L$  includes probe and jig capacitance  
 $R_T$  is  $Z_{OUT}$  of pulse generator (typically 50  $\Omega$ )  
 $f = 1$  MHz

**Figure 3. Test Circuit**

| Test                | Switch Position   | $C_L$ , pF                   | $R_L$ , $\Omega$ | $R_1$ , $\Omega$ |
|---------------------|-------------------|------------------------------|------------------|------------------|
| $t_{PLH} / t_{PHL}$ | Open              | See AC Characteristics Table |                  |                  |
| $t_{PLZ} / t_{PZL}$ | $2 \times V_{CC}$ | -                            | -                | -                |
|                     |                   | See AC Characteristics Table |                  |                  |
| $t_{PHZ} / t_{PZH}$ | GND               | -                            | -                | -                |
|                     |                   | See AC Characteristics Table |                  |                  |

X = Don't Care

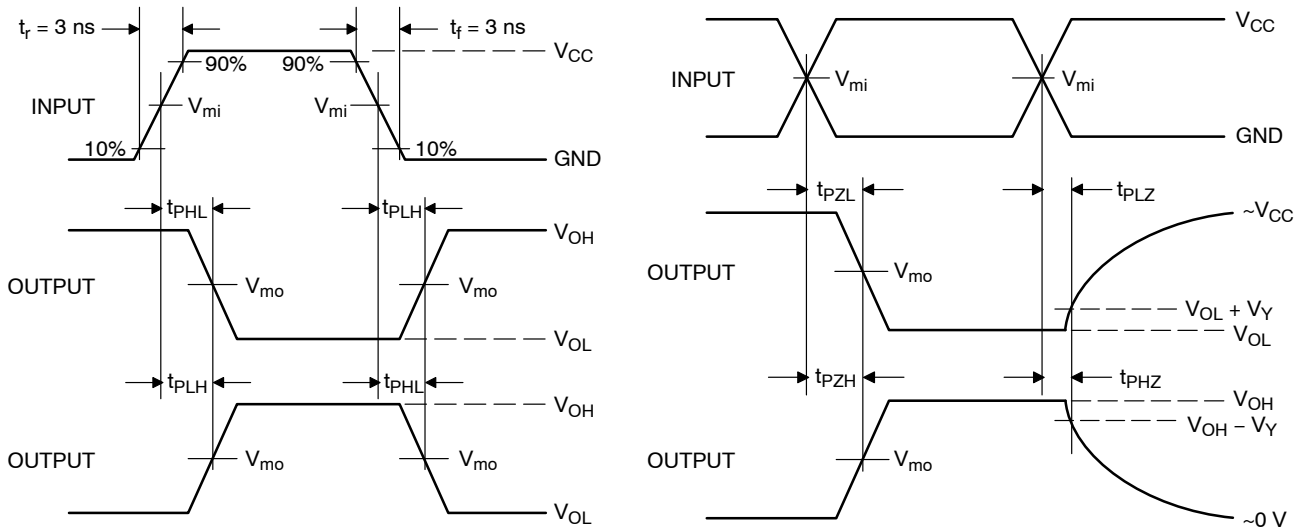

**Figure 4. Switching Waveforms**

| $V_{CC}$ , V | $V_{mi}$ , V | $V_{mo}$ , V            |   | $V_Y$ , V |
|--------------|--------------|-------------------------|---|-----------|
|              |              | $t_{PLH}$ , $t_{PHL}$   | $t_{PZL}$ , $t_{PLZ}$ , $t_{PZH}$ , $t_{PHZ}$ |           |
| 1.65 to 1.95 | $V_{CC}/2$   | $(V_{OH} - V_{OL}) / 2$ | $V_{CC} / 2$                                  | 0.15      |
| 2.3 to 2.7   | $V_{CC}/2$   | $(V_{OH} - V_{OL}) / 2$ | $V_{CC} / 2$                                  | 0.15      |
| 3.0 to 3.6   | $V_{CC}/2$   | $(V_{OH} - V_{OL}) / 2$ | $V_{CC} / 2$                                  | 0.3       |
| 4.5 to 5.5   | $V_{CC}/2$   | $(V_{OH} - V_{OL}) / 2$ | $V_{CC} / 2$                                  | 0.3       |

# NL27WZ14

## ORDERING INFORMATION


| Device                             | Package                   | Specific Device Code | Pin1 Orientation<br>(See below) | Shipping <sup>†</sup> |
|------------------------------------|---------------------------|----------------------|---------------------------------|-----------------------|
| NL27WZ14DFT2G                      | SC-88                     | MA                   | Q4                              | 3000 / Tape & Reel    |
| NLV27WZ14DFT2G*                    | SC-88                     | MA                   | Q4                              | 3000 / Tape & Reel    |
| NL27WZ14DTT1G                      | TSOP-6                    | MA                   | Q4                              | 3000 / Tape & Reel    |
| NL27WZ14DBVT1G<br>(In Development) | SC-74                     | MA                   | Q4                              | 3000 / Tape & Reel    |
| NL27WZ14MU1TCG<br>(In Development) | UDFN6, 1.45 x 1.0 x 0.35P | TBD                  | Q4                              | 3000 / Tape & Reel    |
| NL27WZ14MU3TCG<br>(In Development) | UDFN6, 1.0 x 1.0 x 0.35P  | TBD                  | Q4                              | 3000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

### Pin 1 Orientation in Tape and Reel

Direction of Feed

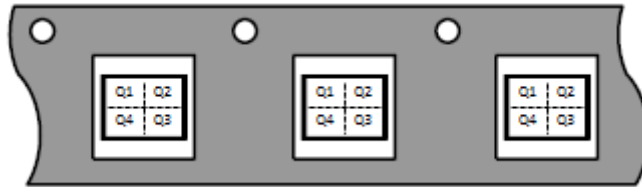




# NL27WZ14


## PACKAGE DIMENSIONS

SC-88/SC70-6/SOT-363  
CASE 419B-02  
ISSUE Y

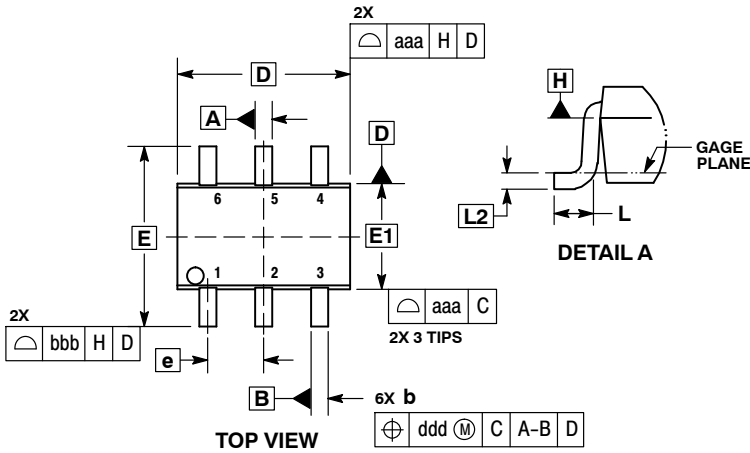


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 PER END.
  4. DIMENSIONS D AND E1 AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AND DATUM H.
  5. DATUMS A AND B ARE DETERMINED AT DATUM H.
  6. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08 AND 0.15 FROM THE TIP.
  7. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF DIMENSION b AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.

| DIM | MILLIMETERS |      |      | INCHES    |       |       |
|-----|-------------|------|------|-----------|-------|-------|
|     | MIN         | NOM  | MAX  | MIN       | NOM   | MAX   |
| A   | ---         | ---  | 1.10 | ---       | ---   | 0.043 |
| A1  | 0.00        | ---  | 0.10 | 0.000     | ---   | 0.004 |
| A2  | 0.70        | 0.90 | 1.00 | 0.027     | 0.035 | 0.039 |
| b   | 0.15        | 0.20 | 0.25 | 0.006     | 0.008 | 0.010 |
| C   | 0.08        | 0.15 | 0.22 | 0.003     | 0.006 | 0.009 |
| D   | 1.80        | 2.00 | 2.20 | 0.070     | 0.078 | 0.086 |
| E   | 2.00        | 2.10 | 2.20 | 0.078     | 0.082 | 0.086 |
| E1  | 1.15        | 1.25 | 1.35 | 0.045     | 0.049 | 0.053 |
| e   | 0.65 BSC    |      |      | 0.026 BSC |       |       |
| L   | 0.26        | 0.36 | 0.46 | 0.010     | 0.014 | 0.018 |
| L2  | 0.15 BSC    |      |      | 0.006 BSC |       |       |
| aaa | 0.15        |      |      | 0.006     |       |       |
| bbb | 0.30        |      |      | 0.012     |       |       |
| ccc | 0.10        |      |      | 0.004     |       |       |
| ddd | 0.10        |      |      | 0.004     |       |       |

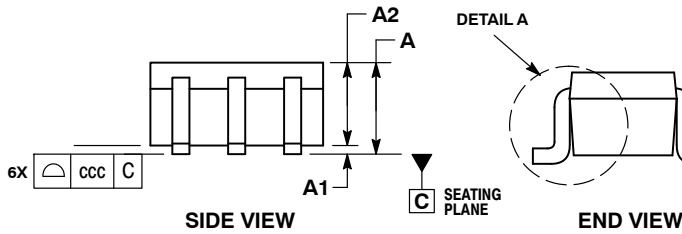

### RECOMMENDED SOLDERING FOOTPRINT\*




\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NL27WZ14

## PACKAGE DIMENSIONS

SC-74  
CASE 318F-05  
ISSUE N

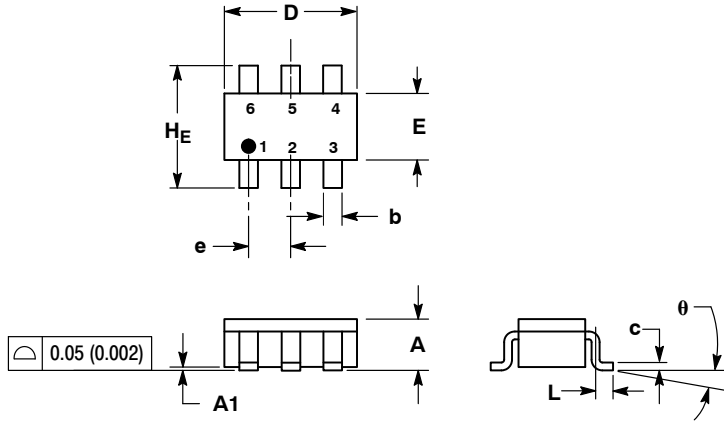


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. 318F-01, -02, -03, -04 OBSOLETE. NEW STANDARD 318F-05.

| DIM   | MILLIMETERS |      |      | INCHES |       |       |
|-------|-------------|------|------|--------|-------|-------|
|       | MIN         | NOM  | MAX  | MIN    | NOM   | MAX   |
| A     | 0.90        | 1.00 | 1.10 | 0.035  | 0.039 | 0.043 |
| A1    | 0.01        | 0.06 | 0.10 | 0.001  | 0.002 | 0.004 |
| b     | 0.25        | 0.37 | 0.50 | 0.010  | 0.015 | 0.020 |
| c     | 0.10        | 0.18 | 0.26 | 0.004  | 0.007 | 0.010 |
| D     | 2.90        | 3.00 | 3.10 | 0.114  | 0.118 | 0.122 |
| E     | 1.30        | 1.50 | 1.70 | 0.051  | 0.059 | 0.067 |
| e     | 0.85        | 0.95 | 1.05 | 0.034  | 0.037 | 0.041 |
| L     | 0.20        | 0.40 | 0.60 | 0.008  | 0.016 | 0.024 |
| HE    | 2.50        | 2.75 | 3.00 | 0.099  | 0.108 | 0.118 |
| theta | -           | -    | -    | -      | -     | -     |

**SOLDERING FOOTPRINT\***

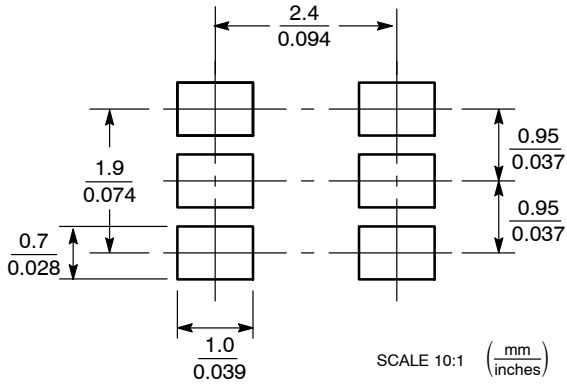

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLE 1:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE  
4. CATHODE  
5. ANODE  
6. CATHODE

STYLE 2:  
PIN 1. NO CONNECTION  
2. COLLECTOR  
3. EMITTER  
4. NO CONNECTION  
5. COLLECTOR  
6. BASE

STYLE 3:  
PIN 1. EMITTER 1  
2. BASE 1  
3. COLLECTOR 2  
4. EMITTER 2  
5. BASE 2  
6. COLLECTOR 1

STYLE 4:  
PIN 1. COLLECTOR 2  
2. EMITTER 1/EMITTER 2  
3. COLLECTOR 1  
4. EMITTER 3  
5. BASE 1/BASE 2/COLLECTOR 3  
6. BASE 3

STYLE 5:  
PIN 1. CHANNEL 1  
2. ANODE  
3. CHANNEL 2  
4. CHANNEL 3  
5. CATHODE  
6. CHANNEL 4

STYLE 6:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE  
4. CATHODE  
5. CATHODE  
6. CATHODE

STYLE 7:  
PIN 1. SOURCE 1  
2. GATE 1  
3. DRAIN 2  
4. SOURCE 2  
5. GATE 2  
6. DRAIN 1

STYLE 8:  
PIN 1. EMITTER 1  
2. BASE 2  
3. COLLECTOR 2  
4. EMITTER 2  
5. BASE 1  
6. COLLECTOR 1

STYLE 9:  
PIN 1. EMITTER 2  
2. BASE 2  
3. COLLECTOR 1  
4. EMITTER 1  
5. BASE 1  
6. COLLECTOR 2


STYLE 10:  
PIN 1. ANODE/CATHODE  
2. BASE  
3. EMITTER  
4. COLLECTOR  
5. ANODE  
6. CATHODE

STYLE 11:  
PIN 1. EMITTER  
2. BASE  
3. ANODE/CATHODE  
4. ANODE  
5. CATHODE  
6. COLLECTOR

# NL27WZ14

## PACKAGE DIMENSIONS

### TSOP-6 CASE 318G-02 ISSUE V

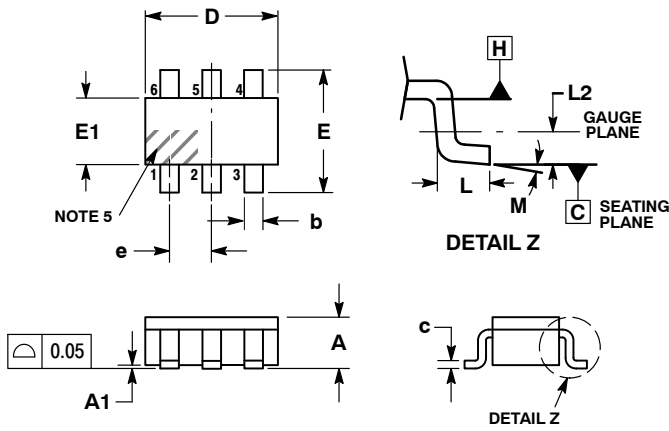

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSIONS D AND E1 ARE DETERMINED AT DATUM H.
5. PIN ONE INDICATOR MUST BE LOCATED IN THE INDICATED ZONE.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN         | NOM  | MAX  |
| A   | 0.90        | 1.00 | 1.10 |
| A1  | 0.01        | 0.06 | 0.10 |
| b   | 0.25        | 0.38 | 0.50 |
| c   | 0.10        | 0.18 | 0.26 |
| D   | 2.90        | 3.00 | 3.10 |
| E   | 2.50        | 2.75 | 3.00 |
| E1  | 1.30        | 1.50 | 1.70 |
| e   | 0.85        | 0.95 | 1.05 |
| L   | 0.20        | 0.40 | 0.60 |
| L2  | 0.25 BSC    |      |      |
| M   | 0°          | -    | 10°  |

#### STYLE 1:

- PIN 1. DRAIN  
2. DRAIN  
3. GATE  
4. SOURCE  
5. DRAIN  
6. DRAIN

#### STYLE 2:

- PIN 1. EMITTER 2  
2. BASE 1  
3. COLLECTOR 1  
4. EMITTER 1  
5. BASE 2  
6. COLLECTOR 2

#### STYLE 3:

- PIN 1. ENABLE  
2. N/C  
3. R BOOST  
4. Vz  
5. V in  
6. V out

#### STYLE 4:

- PIN 1. N/C  
2. V in  
3. NOT USED  
4. GROUND  
5. ENABLE  
6. LOAD

#### STYLE 5:

- PIN 1. EMITTER 2  
2. BASE 2  
3. COLLECTOR 1  
4. EMITTER 1  
5. BASE 1  
6. COLLECTOR 2

#### STYLE 6:

- PIN 1. COLLECTOR  
2. COLLECTOR  
3. BASE  
4. EMITTER  
5. COLLECTOR  
6. COLLECTOR

#### STYLE 7:

- PIN 1. COLLECTOR  
2. COLLECTOR  
3. BASE  
4. N/C  
5. COLLECTOR  
6. EMITTER

#### STYLE 8:

- PIN 1. Vbus  
2. D(in)  
3. D(in)+  
4. D(out)+  
5. D(out)  
6. GND

#### STYLE 9:

- PIN 1. LOW VOLTAGE GATE  
2. DRAIN  
3. SOURCE  
4. DRAIN  
5. DRAIN  
6. HIGH VOLTAGE GATE

#### STYLE 10:

- PIN 1. D(OUT)+  
2. GND  
3. D(OUT)-  
4. D(IN)-  
5. VBUS  
6. D(IN)+

#### STYLE 11:

- PIN 1. SOURCE 1  
2. DRAIN 2  
3. DRAIN 2  
4. SOURCE 2  
5. GATE 1  
6. DRAIN 1/GATE 2

#### STYLE 12:

- PIN 1. I/O  
2. GROUND  
3. I/O  
4. I/O  
5. VCC  
6. I/O

#### STYLE 13:

- PIN 1. GATE 1  
2. SOURCE 2  
3. GATE 2  
4. DRAIN 2  
5. SOURCE 1  
6. DRAIN 1

#### STYLE 14:

- PIN 1. ANODE  
2. SOURCE  
3. GATE  
4. CATHODE/DRAIN  
5. CATHODE/DRAIN  
6. CATHODE/DRAIN

#### STYLE 15:

- PIN 1. ANODE  
2. SOURCE  
3. GATE  
4. DRAIN  
5. N/C  
6. CATHODE


#### STYLE 16:

- PIN 1. ANODE/CATHODE  
2. BASE  
3. EMITTER  
4. COLLECTOR  
5. ANODE  
6. CATHODE

#### STYLE 17:

- PIN 1. EMITTER  
2. BASE  
3. ANODE/CATHODE  
4. ANODE  
5. CATHODE  
6. COLLECTOR

### RECOMMENDED SOLDERING FOOTPRINT\*




DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NL27WZ14

## PACKAGE DIMENSIONS

UDFN6, 1.45x1.0, 0.5P  
CASE 517AQ  
ISSUE O

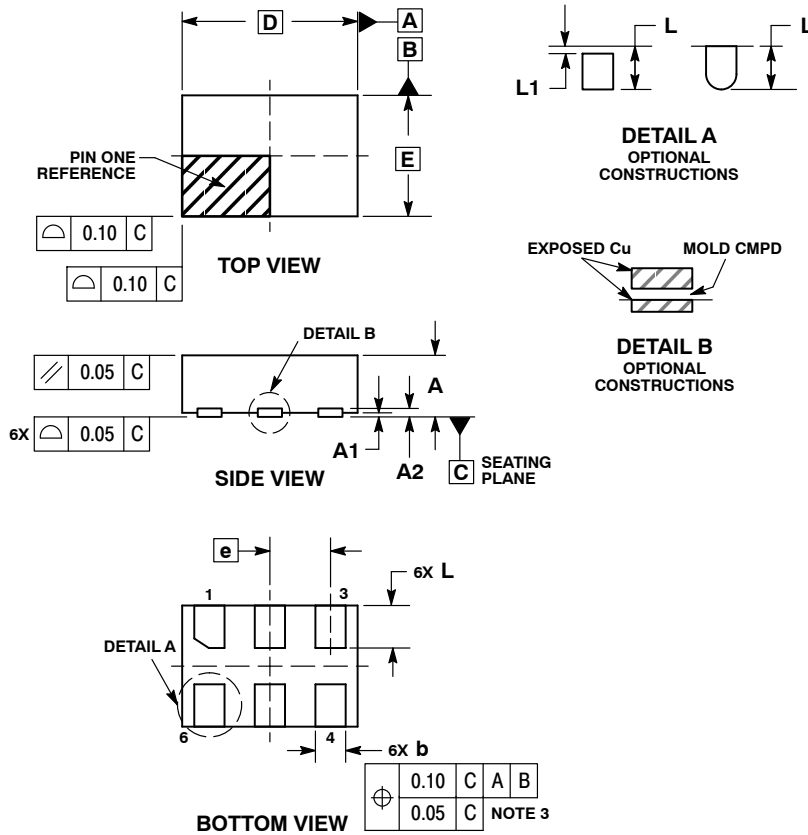


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM THE TERMINAL TIP.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.45        | 0.55 |
| A1  | 0.00        | 0.05 |
| A2  | 0.07        | REF  |
| b   | 0.20        | 0.30 |
| D   | 1.45        | BSC  |
| E   | 1.00        | BSC  |
| e   | 0.50        | BSC  |
| L   | 0.30        | 0.40 |
| L1  | ---         | 0.15 |

### MOUNTING FOOTPRINT




DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NL27WZ14

## PACKAGE DIMENSIONS

UDFN6, 1x1, 0.35P  
CASE 517BX  
ISSUE O

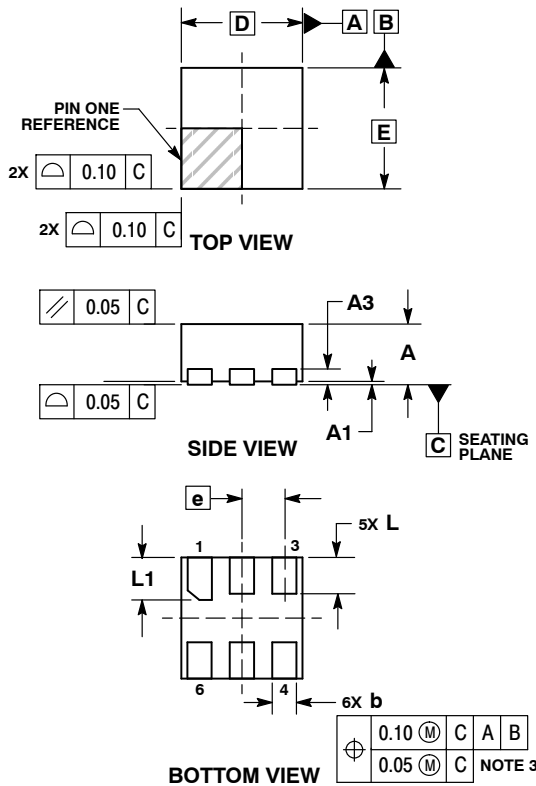


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 MM FROM TERMINAL TIP.
4. PACKAGE DIMENSIONS EXCLUSIVE OF BURRS AND MOLD FLASH.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.45        | 0.55 |
| A1  | 0.00        | 0.05 |
| A3  | 0.13 REF    |      |
| b   | 0.12        | 0.22 |
| D   | 1.00 BSC    |      |
| E   | 1.00 BSC    |      |
| e   | 0.35 BSC    |      |
| L   | 0.25        | 0.35 |
| L1  | 0.30        | 0.40 |

**RECOMMENDED SOLDERING FOOTPRINT\***

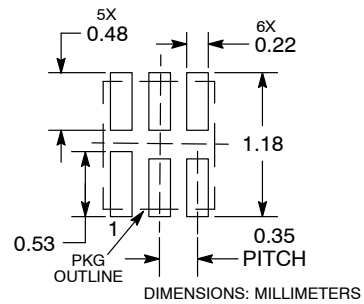

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Markings.pdf](http://www.onsemi.com/site/pdf/Patent-Markings.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

**PUBLICATION ORDERING INFORMATION**

**LITERATURE FULFILLMENT:**

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[NL27WZ14DFT2G](#) [NL27WZ14DTT1G](#) [NL27WZ14MU1TCG](#) [NL27WZ14MU3TCG](#)