General-purpose Schottky diodes

Rev. 9 — 18 March 2015

**Product data sheet** 

### 1. Product profile

#### 1.1 General description

General-purpose Schottky diodes in small Surface-Mounted Device (SMD) plastic packages.

Type number	Package		Configuration
	Nexperia	JEITA	
1PS70SB40	SOT323	SC-70	single diode
1PS76SB40	SOD323	SC-76	single diode
1PS79SB40	SOD523	SC-79	single diode
BAS40	SOT23	-	single diode
BAS40H	SOD123F	-	single diode
BAS40L	SOD882	-	single diode
BAS40W	SOT323	SC-70	single diode
1PS70SB44	SOT323	SC-70	dual series
BAS40-04	SOT23	-	dual series
BAS40-04W	SOT323	SC-70	dual series
1PS70SB45	SOT323	SC-70	dual common cathode
1PS75SB45	SOT416	SC-75	dual common cathode
BAS40-05	SOT23	-	dual common cathode
BAS40-05W	SOT323	SC-70	dual common cathode
1PS70SB46	SOT323	SC-70	dual common anode
BAS40-06	SOT23	-	dual common anode
BAS40-06W	SOT323	SC-70	dual common anode
BAS40-07	SOT143B	-	dual isolated
BAS40-07V	SOT666	-	dual isolated
BAS40-05V	SOT666	-	quadruple common cathode/ common cathode
1PS88SB48	SOT363	SC-88	quadruple common cathode/ common cathode
BAS40XY	SOT363	SC-88	quadruple; 2 series

#### Table 1. Product overview

# nexperia

General-purpose Schottky diodes

#### **1.2 Features and benefits**

- High switching speed
- High breakdown voltage
- AEC-Q101 qualified

#### **1.3 Applications**

Ultra high-speed switching

- Voltage clamping

Low leakage current

Low capacitance

#### 1.4 Quick reference data

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
Per diode							
I <sub>F</sub>	forward current			-	-	120	mA
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 1 mA	[1]	-	-	380	mV
V <sub>R</sub>	reverse voltage			-	-	40	V

 $\label{eq:point} \begin{tabular}{ll} \mbox{Pulse test: } t_p \leq 300 \ \mu \mbox{s; } \delta \leq 0.02. \end{tabular}$ 

### 2. Pinning information

Table 3.	Pinning		
Pin	Description	Simplified outline	Symbol
BAS40H;	; 1PS76SB40; 1PS79SB40		
1	cathode	[1]	
2	anode	1 001aab540	1 <u>-</u> 2 sym001
BAS40L			
1	cathode	[1]	- /
2	anode	I   I     Image: Constraint of the second s	1 <u>F</u> 2 sym001
BAS40; E	3AS40W; 1PS70SB40		
1	anode		
2	not connected	3	3
3	cathode	1 2 006aaa144	1 2 n.c. 006aaa436

General-purpose Schottky diodes

Table 3. Pir	nningcontinued		
Pin	Description	Simplified outline	Symbol
BAS40-04; BA	AS40-04W; 1PS70SB44		
1	anode (diode 1)		_
2	cathode (diode 2)	3	3
3	cathode (diode 1),		1
	anode (diode 2)		006aaa437
		1 2	
		006aaa144	
BAS40-05; BA	AS40-05W; 1PS70SB45; 1PS75SB45		
1	anode (diode 1)		3
2	anode (diode 2)	3	
3	cathode (diode 1),		
	cathode (diode 2)		
		1 2	1 2
		006aaa144	006aaa438
BAS40-06; BA	AS40-06W; 1PS70SB46		
1	cathode (diode 1)		2
2	cathode (diode 2)	3	3
3	anode (diode 1),		1 <b>1</b> 2
	anode (diode 2)		006aaa439
		1 2	
		006aaa144	
BAS40-07	1	1	1
1	cathode (diode 1)	4 3	4 3
2	cathode (diode 2)		
3	anode (diode 2)		
4	anode (diode 1)		
		1 2	006aaa434
BAS40-07V		1	1
1	anode (diode 1)		
2	not connected		6 5 4
3	cathode (diode 2)		
4	anode (diode 2)		
5	not connected		1 2 3 <i>006aaa440</i>
6	cathode (diode 1)	123	

General-purpose Schottky diodes

Pin	Description	Simplified outline	Symbol		
BAS40-0	5V; 1PS88SB48				
1	anode (diode 1)				
2	anode (diode 2)	6 5 4			
3	cathode (diode 3), cathode (diode 4)				
4	anode (diode 3)	0			
5	anode (diode 4)	1 2 3 001aab555			
6	cathode (diode 1), cathode (diode 2)		006aaa44		
BAS40XY	/				
1	anode (diode 1)				
2	cathode (diode 2)				
3	anode (diode 3), cathode (diode 4)	0			
4	anode (diode 4)				
5	cathode (diode 3)				
6	cathode (diode 1), anode (diode 2)		1 2 3 006aaa256		

[1] The marking bar indicates the cathode.

General-purpose Schottky diodes

### 3. Ordering information

Table 4. Orde	ering inform	nation	
Type number	Package		
	Name	Description	Version
1PS70SB40	SC-70	plastic surface-mounted package; 3 leads	SOT323
1PS76SB40	SC-76	plastic surface-mounted package; 2 leads	SOD323
1PS79SB40	SC-79	plastic surface-mounted package; 2 leads	SOD523
BAS40	-	plastic surface-mounted package; 3 leads	SOT23
BAS40H	-	plastic surface-mounted package; 2 leads	SOD123F
BAS40L	-	leadless ultra small plastic package; 2 terminals; body 1.0 $\times$ 0.6 $\times$ 0.5 mm	SOD882
BAS40W	SC-70	plastic surface-mounted package; 3 leads	SOT323
1PS70SB44	SC-70	plastic surface-mounted package; 3 leads	SOT323
BAS40-04	-	plastic surface-mounted package; 3 leads	SOT23
BAS40-04W	SC-70	plastic surface-mounted package; 3 leads	SOT323
1PS70SB45	SC-70	plastic surface-mounted package; 3 leads	SOT323
1PS75SB45	SC-75	plastic surface-mounted package; 3 leads	SOT416
BAS40-05	-	plastic surface-mounted package; 3 leads	SOT23
BAS40-05W	SC-70	plastic surface-mounted package; 3 leads	SOT323
1PS70SB46	SC-70	plastic surface-mounted package; 3 leads	SOT323
BAS40-06	-	plastic surface-mounted package; 3 leads	SOT23
BAS40-06W	SC-70	plastic surface-mounted package; 3 leads	SOT323
BAS40-07	-	plastic surface-mounted package; 4 leads	SOT143B
BAS40-07V	-	plastic surface-mounted package; 6 leads	SOT666
BAS40-05V	-	plastic surface-mounted package; 6 leads	SOT666
1PS88SB48	SC-88	plastic surface-mounted package; 6 leads	SOT363
BAS40XY	SC-88	plastic surface-mounted package; 6 leads	SOT363

General-purpose Schottky diodes

#### 4. Marking

Table 5. Marking codes							
Type number	Marking code <sup>[1]</sup>	Type number	Marking code <sup>[1]</sup>				
1PS70SB40	6*3	1PS75SB45	45				
1PS76SB40	S4	BAS40-05	45*				
1PS79SB40	Т	BAS40-05W	65*				
BAS40	43*	1PS70SB46	6*6				
BAS40H	AJ	BAS40-06	46*				
BAS40L	S6	BAS40-06W	66*				
BAS40W	63*	BAS40-07	47*				
1PS70SB44	6*4	BAS40-07V	67				
BAS40-04	44*	BAS40-05V	65				
BAS40-04W	64*	1PS88SB48	8*5				
1PS70SB45	6*5	BAS40XY	40*				

[1] \* = -: made in Hong Kong

\* = p: made in Hong Kong

\* = t: made in Malaysia

\* = W: made in China

### 5. Limiting values

#### Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
Per diode			I		
V <sub>R</sub>	reverse voltage		-	40	V
l <sub>F</sub>	forward current		-	120	mA
I <sub>FRM</sub>	repetitive peak forward current	$t_p \leq 1 \text{ s};  \delta \leq 0.5$	-	120	mA
I <sub>FSM</sub>	non-repetitive peak forward current	$t_p \le 10 \text{ ms}$	<u>[1]</u> -	200	mA
Tj	junction temperature		-	150	°C
T <sub>amb</sub>	ambient temperature		-65	+150	°C
T <sub>stg</sub>	storage temperature		-65	+150	°C

[1]  $T_j = 25 \ ^\circ C$  prior to surge.

General-purpose Schottky diodes

### 6. Thermal characteristics

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
Per devic	e						
R <sub>th(j-a)</sub>	thermal resistance from junction to ambient	in free air	<u>[1]</u>				
	SOT23			-	-	500	K/W
	SOT143B			-	-	500	K/W
	SOT363 (1PS88SB48)			-	-	416	K/W
	SOT416			-	-	833	K/W
	SOT666 (BAS40-05V)		[2]	-	-	225	K/W
	SOT666 (BAS40-07V)		[2]	-	-	416	K/W
	SOD123F		[2]	-	-	330	K/W
	SOD323			-	-	450	K/W
	SOD523		[2]	-	-	450	K/W
	SOD882		[2]	-	-	500	K/W
	SOT323			-	-	625	K/W
R <sub>th(j-sp)</sub>	thermal resistance from junction to solder point						
	SOT363 (BAS40XY)		[3]	-	-	260	K/W

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

[2] Reflow soldering is the only recommended soldering method.

[3] Soldering point at pins 2, 3, 5 and 6.

### 7. Characteristics

#### Table 8.Characteristics

 $T_{amb} = 25 \ ^{\circ}C$  unless otherwise specified.


Symbol	Parameter	Conditions		Min	Тур	Max	Unit
Per diode	)						
V <sub>F</sub>	forward voltage		[1]				
	I <sub>F</sub> = 1 mA		-	-	380	mV	
		I <sub>F</sub> = 10 mA		-	-	500	mV
		I <sub>F</sub> = 40 mA		-	-	1	V
I <sub>R</sub> reverse current	reverse current	V <sub>R</sub> = 30 V		-	-	1	μA
		V <sub>R</sub> = 40 V		-	-	10	μA
C <sub>d</sub>	diode capacitance	V <sub>R</sub> = 0 V; f = 1 MHz		-	-	5	pF

 $\label{eq:point} \begin{tabular}{ll} \end{tabular} \begin{tabular}{ll} \end{tabular} \end{tabular} \end{tabular} \begin{tabular}{ll} \end{tabular} \end{tabular} \end{tabular} \end{tabular} \begin{tabular}{ll} \end{tabular} \$ 

#### Nexperia

## BAS40 series; 1PSxxSB4x series

**General-purpose Schottky diodes** 

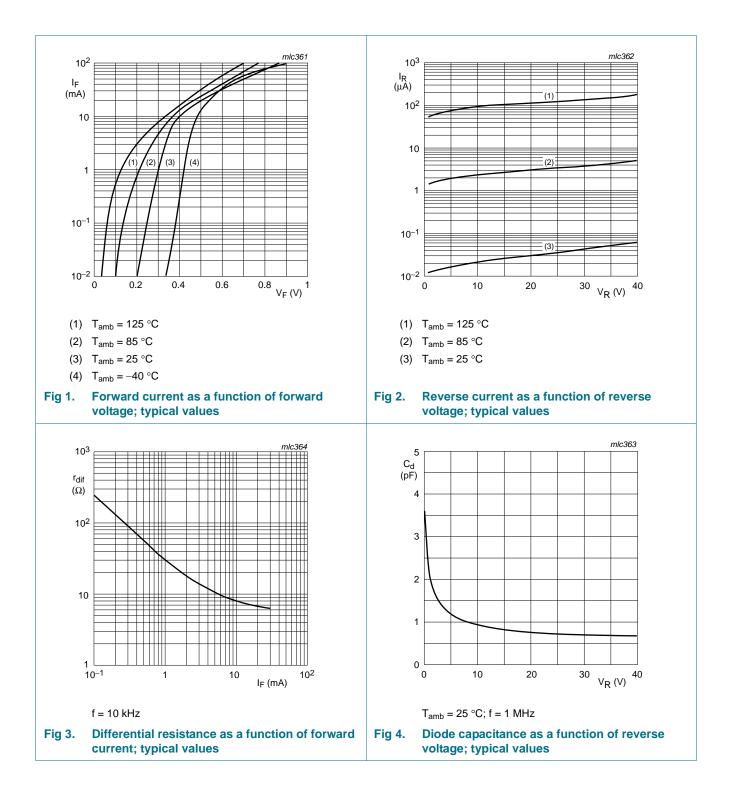


General-purpose Schottky diodes

### 8. Test information

#### 8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101* - *Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.


### 9. Package outline

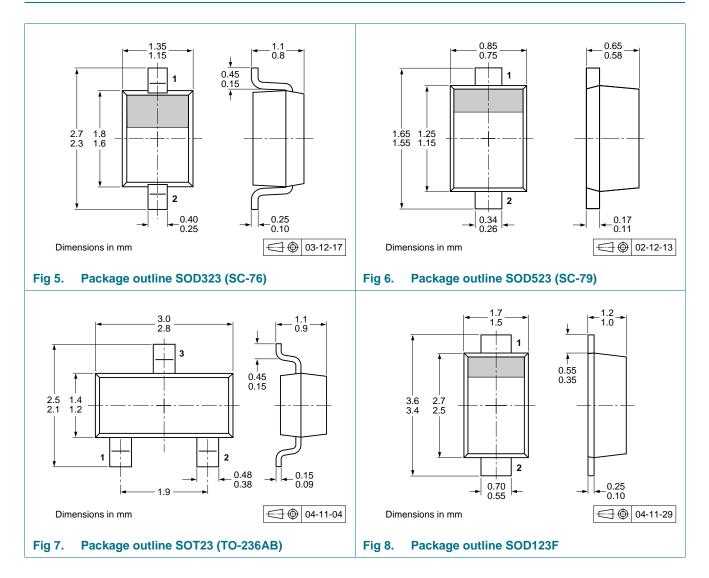

#### Nexperia

## BAS40 series; 1PSxxSB4x series

General-purpose Schottky diodes

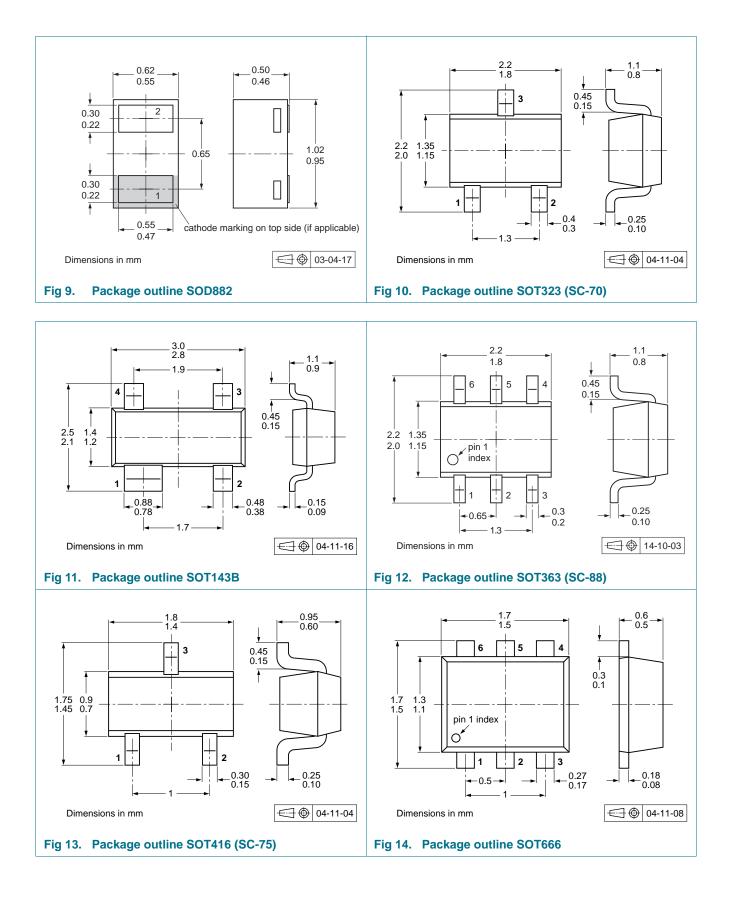

General-purpose Schottky diodes

### **10. Packing information**

#### Table 9. Packing methods

The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Type number	Package	Description		Packing quantity				
				3000	4000	8000	10000	
1PS70SB40	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
1PS76SB40	SOD323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
1PS79SB40	SOD523	2 mm pitch, 8 mm tape and reel		-	-	-315	-	
		4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
BAS40	SOT23	4 mm pitch, 8 mm tape and reel		-215	-	-	-235	
BAS40H	SOD123F	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
BAS40L	SOD882	2 mm pitch, 8 mm tape and reel		-	-	-	-315	
BAS40W	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
1PS70SB44	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
BAS40-04	SOT23	4 mm pitch, 8 mm tape and reel		-215	-	-	-235	
BAS40-04W	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
1PS70SB45	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
1PS75SB45	SOT416	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
BAS40-05	SOT23	4 mm pitch, 8 mm tape and reel		-215	-	-	-235	
BAS40-05W	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
1PS70SB46	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
BAS40-06	SOT23	4 mm pitch, 8 mm tape and reel		-215	-	-	-235	
BAS40-06W	SOT323	4 mm pitch, 8 mm tape and reel		-115	-	-	-135	
BAS40-07	SOT143B	4 mm pitch, 8 mm tape and reel		-215	-	-	-235	
BAS40-07V	SOT666	2 mm pitch, 8 mm tape and reel		-	-	-315	-	
		4 mm pitch, 8 mm tape and reel		-	-115	-	-	
BAS40-05V	SOT666	2 mm pitch, 8 mm tape and reel		-	-	-315	-	
		4 mm pitch, 8 mm tape and reel		-	-115	-	-	
1PS88SB48	SOT363	4 mm pitch, 8 mm tape and reel; T1	[2]	-115	-	-	-135	
		4 mm pitch, 8 mm tape and reel; T2	[3]	-125	-	-	-165	
BAS40XY	SOT363	4 mm pitch, 8 mm tape and reel; T1	[2]	-115	-	-	-135	
		4 mm pitch, 8 mm tape and reel; T2	[3]	-125	-	-	-165	


[1] For further information and the availability of packing methods, see Section 14.

[2] T1: normal taping


[3] T2: reverse taping

General-purpose Schottky diodes


#### 11. Soldering

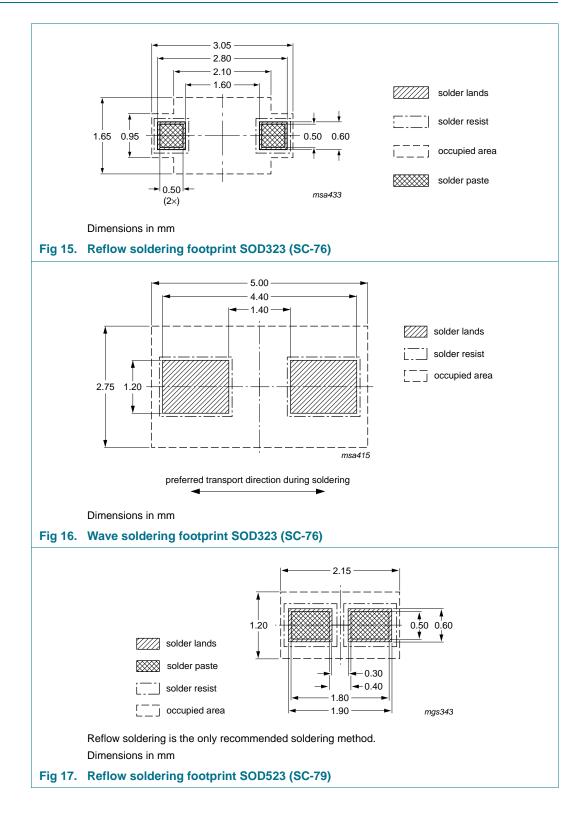


General-purpose Schottky diodes

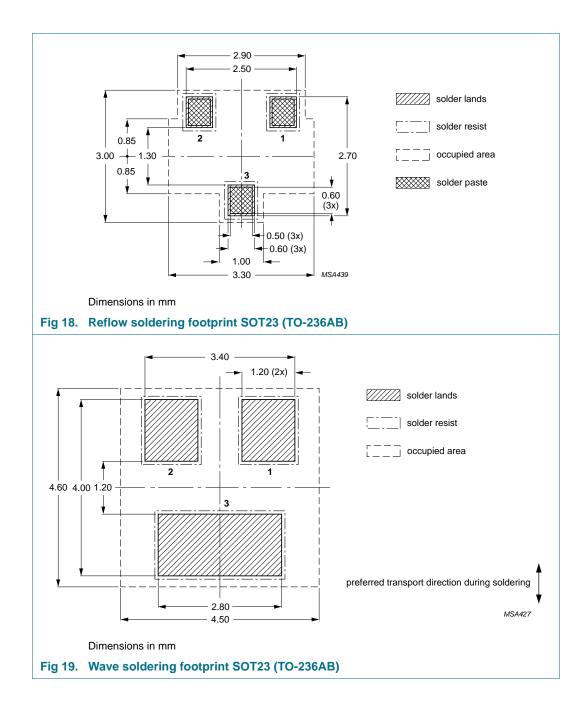


General-purpose Schottky diodes

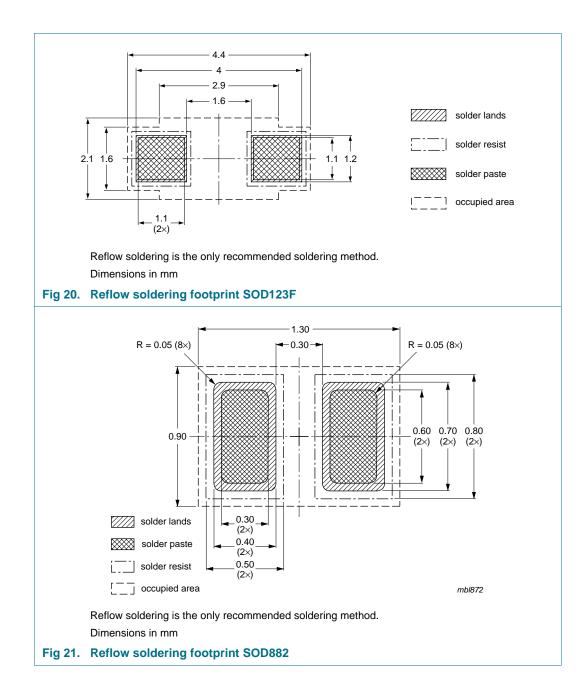


General-purpose Schottky diodes

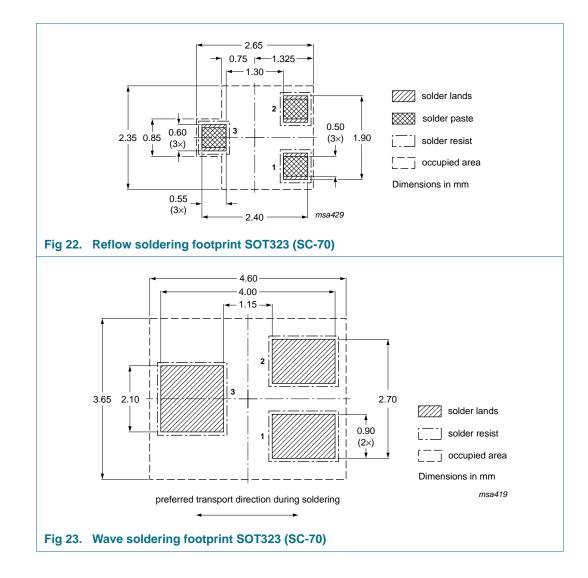


General-purpose Schottky diodes

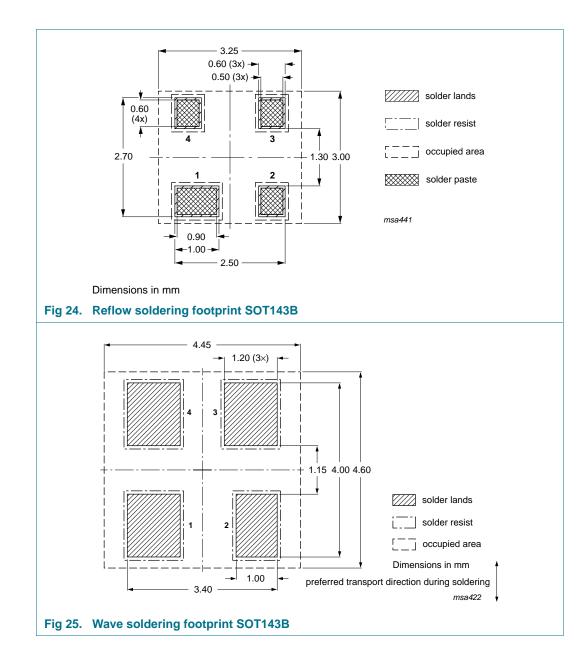

General-purpose Schottky diodes

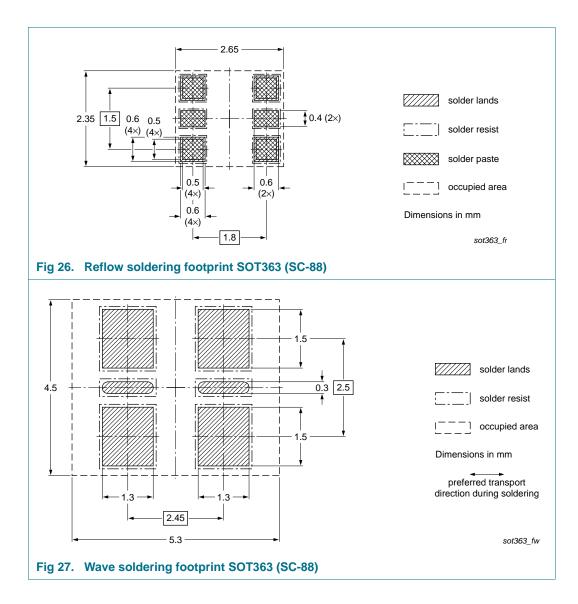

General-purpose Schottky diodes

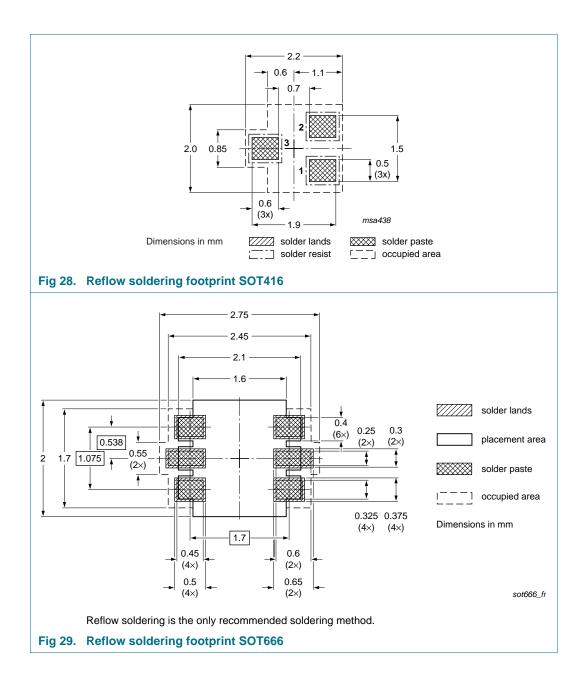

General-purpose Schottky diodes

### **12. Revision history**

Table 10. Revision history				
Document ID	Release date	Data sheet status	Change notice	Supersedes
BAS40_1PSXXSB4X_SER v.9	20150318	Product data sheet	-	BAS40_1PSXXSB4X_SER_8
Modifications:	guidelines of	NXP Semiconductors.	C C	mply with the new identity
	<ul> <li>Legal texts have</li> </ul>	ave been adapted to the	new company nar	ne where appropriate.
BAS40_1PSXXSB4X_SER_8	20100113	Product data sheet	-	BAS40_1PSXXSB4X_SER_7
BAS40_1PSXXSB4X_SER_7	20060512	Product data sheet	-	BAS40_1PSXXSB4X_SER_6
BAS40_1PSXXSB4X_SER_6	20050809	Product data sheet	-	1PS70SB40_3 1PS75SB45_2 1PS76SB40_3 1PS79SB40_2 1PS88SB48_3 BAS40H_1 BAS40L_1 BAS40-05V_1 BAS40-07V_1 BAS40W_3 BAS40_SERIES_5
1PS70SB40_3	19990426	Product specification	-	1PS70SB40_2
1PS75SB45_2	19990426	Product specification	-	1PS75SB45_1
1PS76SB40_3	20040126	Product specification	-	1PS76SB40_2
1PS79SB40_2	19990426	Product specification	-	1PS79SB40_1
1PS88SB48_3	20021107	Product specification	-	1PS88SB48_2
BAS40H_1	20050425	Product data sheet	-	-
BAS40L_1	20030520	Product specification	-	-
BAS40-05V_1	20021121	Product specification	-	-
BAS40-07V_1	20020327	Product specification	-	-
BAS40W_3	19990426	Product specification	-	BAS40W_2
BAS40_SERIES_5	20011010	Product specification	-	BAS40_4

#### Table 10. Revision history

### 13. Legal information

#### 13.1 Data sheet status

Document status[1][2]	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nexperia.com">http://www.nexperia.com</a>.

#### 13.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any

representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and

customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 13.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

#### Suitability for use in automotive applications — This Nexperia product has been gualified for use in automotive

applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

#### Terms and conditions of commercial sale - Nexperia

products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

```
BAS40_1PSXXSB4X_SER
```

Product data sheet

#### **General-purpose Schottky diodes**

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### 13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

### 14. Contact information

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: salesaddresses@nexperia.com

General-purpose Schottky diodes

### **15. Contents**

1	Product profile 1
1.1	General description 1
1.2	Features and benefits 2
1.3	Applications 2
1.4	Quick reference data 2
2	Pinning information 2
3	Ordering information 5
4	Marking 6
5	Limiting values 6
6	Thermal characteristics 7
7	Characteristics 7
8	Test information
8.1	Quality information 9
9	Package outline 9
10	Packing information 11
11	Soldering 12
12	Revision history 19
13	Legal information 20
13.1	Data sheet status 20
13.2	Definitions 20
13.3	Disclaimers
13.4	Trademarks 21
14	Contact information 21
15	Contents 22

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### NXP:

 IPS70SB40,115
 IPS70SB44,115
 IPS70SB45,115
 IPS70SB46,115
 IPS75SB45,135
 IPS75SB45,135

 1PS76SB40,115
 1PS79SB40,115
 1PS88SB48,115
 1PS79SB40,699
 BAS40,235
 BAS40-04,235
 BAS40-04,235
 BAS40-04,235
 BAS40-04,235
 BAS40-04,235
 BAS40-04,215

 BAS40-04W,115
 BAS40-05,235
 BAS40-05,215
 BAS40-05V,115
 BAS40-05W,115
 BAS40-06,235
 BAS40-06,215

 BAS40-06W,115
 BAS40-07,215
 BAS40-07V,115
 BAS40H,115
 BAS40L,315
 BAS40,215
 BAS40W,115

 BAS40XY,115
 1PS76SB40,135
 IPS76SB40,135
 IPS76SB40,135
 IPS76SB40,135
 IPS76SB40,135